

2000nm In-line Polarizer

Description

The 2000nm In-line Polarizer is a Micro Optics device can be used to convert un-polarized light into polarized light with high extinction ratio. It can also be used to enhance the extinction ratio of signals. The In-line polarizer offers low insertion loss, high extinction ratio, high return loss and excellent environmental stability and reliability. It is ideal for high speed communication systems and test instrumentation applications.


Key Features

- Compact size
- Low insertion loss
- High extinction ratio
- Excellent stability and reliability

Applications

- Fiber lasers
- Fiber amplifiers
- Fiber Sensors
- Optical Communications

Mechanical Dimension

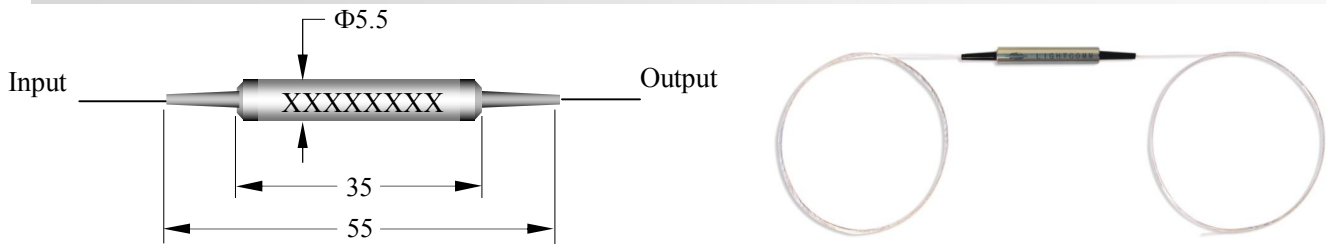

Specifications

Parameter	Type	Unit	In-line Polarizer
Center wavelength		nm	2000
Operating bandwidth		nm	±30
Insertion loss		dB	≤1.0
Extinction ratio @23°C		dB	≥20
Return loss		dB	≥50
Fiber type		/	Option1: PMF- PMF Option2: SMF - PMF Option3: SMF – SMF
Handling power		mW	≤300
Operating temperature		°C	-5~70
Storage Temperature		°C	-40~85
Dimensions		mm	Φ5.5×L35

* For option2 and option3, all of Insertion Loss should plus 3.0dB when launching circular polarized light;

** IL is 0.3dB higher, RL is 5dB lower and ER is 2dB lower for each connector added. The default connector key is aligned to slow axis.

Ordering Information

ILP-XXX-XXX-X-X-XX/XXX-XX*XX

